


**MAIN PARAMETER SPECIFICATION**

1. Design and Manufacture: API 602
2. Threaded End: ASME/ANSI B1.20.1
3. Pressure - Temp: ASME/ANSI B16.34
4. Pressure Test: API 598

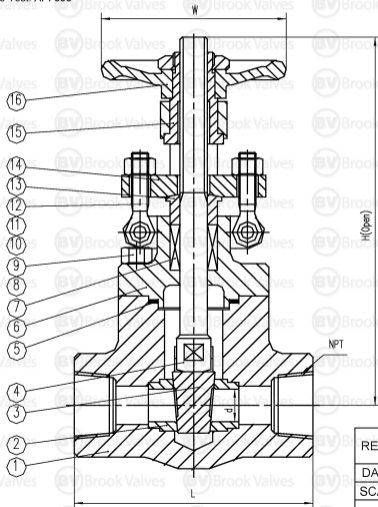

NO	PART NAME	MATERIAL
1	BODY	ASTM A182 F316L
2	SEAT	ASTM A276 316L + STL
3	DISC	ASTM A276 316L
4	STEM	ASTM A276 316L
5	GASKET	SS316L + GRAPHITE
6	BONNET	ASTM A182 F316L
7	STEM PACKING	GRAPHITE
8	BONNET BOLT	ASTM A193 B8
9	BONNET NUT	ASTM A194 8
10	PIN	ASTM A276 316L
11	GLAND NUT	ASTM A194 8
12	GLAND EYEBOLT	ASTM A193 B8
13	GLAND	ASTM A276 316L
14	GLAND FLANGE	ASTM A182 F316L
15	STEM NUT	ASTM A276 420
16	HAND WHEEL	ASTM A105

SIZE	d	L	NPT	H	W
15	10	79	1/2	155	100
20	13.6	92	3/4	160	100
25	18	111	1	188	125
32	24	120	1 1/4	232	160
40	29	152	1 1/2	245	160
50	36.5	172	2	280	180

REV C	BROOK VALVES	
DATE	AUG 2015	<b>SSGA800 NPT</b>
SCALE	TO FIT	
<b>316L STAINLESS STEEL GATE VALVE 800 LB - NPT</b>		