




| SIZE | L | d | d1 | d2 | N | M | D | D1 | T | T1 | H | H1 | H2 | W | TORQUE Nm | WEIGHT Kg |
|------|-----|-----|-----|-----|----|------|-------|-----|----|-----|-----|-----|----|-----|-----------|-----------|
| 150 | 403 | 150 | 216 | 270 | 12 | 22.5 | 317.5 | 125 | 35 | 1.6 | 284 | 170 | 50 | 300 | 930 | 90 |



Fire Safe Certified to API 607 5th Edition

1. Design and Manufactured : ANSI B16.34
2. Valve Inspection & Test : API 598
3. Face to Face Dimensions : ANSI B16.10
4. Flange Connection Dimensions : ANSI B16.5
5. Blow-out Proof Stem
6. Fire Safe : API 607 5th Edition

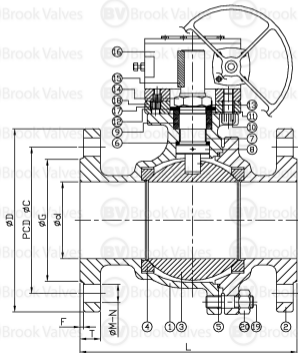

| NO. | PARTS | MATERIAL |
|-----|--------------------|----------------|
| 1 | BODY | ASTM A351 CF8M |
| 2 | CAP | ASTM A351 CF8M |
| 3 | BALL | ASTM A351 CF8M |
| 4 | SEAT | TFM 1600 |
| 5 | BODY SEAL | GRAPHITE |
| 6 | THRUST WASHER | CTFE |
| 7 | PACKING | GRAPHITE |
| 8 | STEM | ASTM A276 316 |
| 9 | GLAND | AISI 304 |
| 10 | STOPPER | AISI 304 |
| 11 | CIRCLIPS FOR SHAFT | AISI 304 |
| 12 | STEEL TUBE | AISI 304 |
| 13 | WRENCH BLOCK | AISI 304 |
| 14 | BOLT | AISI 304 |
| 15 | BOLT | AISI 304 |

| REV D | BROOK VALVES | |
|---|--------------|---------|
| DATE | JAN 2012 | SS2020N |
| SCALE | TO FIT | |
| 316SS FIRESAFE API 607 BALL VALVE CLASS 300 | | |