



DESIGN & MFT	API 600	ENDS CONNECTION	R.F.
PRE - TEMP RATING	ASME B16.34	INSPECT & TEST	API 598
F - F DIMENSION	ASME B16.10	FLANGE DIMENSION	ASME B16.5
MARKING	MSS - SP - 25	PAINTING	STD SILVER

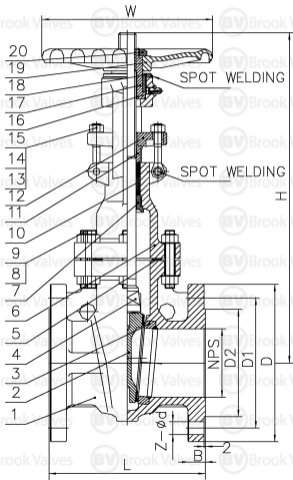

SIZE	L	D	D1	D2	B	H	W	Z - d
40	165	125	98.4	73	14.7	287	180	4 - 16
50	178	150	120.7	92	16.3	333	200	4 - 19
65	190	180	139.7	105	18	375	200	4 - 19
80	203	190	152.4	127	19.5	400	220	4 - 19
100	229	230	190.5	157	24.3	483	250	8 - 19
125	254	255	215.9	186	24.3	532	280	8 - 22
150	267	280	241.3	216	25.9	581	300	8 - 22
200	292	345	298.5	270	29	729	350	8 - 22
250	330	405	362	324	30.6	905	400	12 - 25.4
300	356	485	431.8	381	32.2	1060	450	12 - 25.4
350	381	535	476.3	413	35.4	1185	500	12 - 28.5

NO	PART NAME	MATERIAL
1	BODY	ASTM A216 WCB
2	WEDGE	ASTM A216 WCB + 13CR
3	SEAT	ASTM A105 + STL
4	STEM	ASTM A182 F6a
5	GASKET	SS304 + GRAPHITE
6	BONNET	ASTM A216 WCB
7	BACK SEAT	ASTM A182 F6
8	NUT	ASTM A194 2H
9	STUD	ASTM A193 B7
10	PACKING	GRAPHITE
11	GLAND	ASTM A182 F6
12	GLAND FLANGE	ASTM A216 WCB
13	EYE NUT	ASTM A194 2H
14	EYE STUD	ASTM A193 B7
15	PIN	C.S.
16	OIL FILLER	COPPER ALLOY
17	STEM NUT	COPPER ALLOY
18	GLAND NUT	C.S.
19	HAND WHEEL	KT330-8
20	LOCK NUT	C.S.

REV C	<b>BROOK VALVES</b>  <b>GA150</b>  <b>GATE VALVE OS&amp;Y CLASS 150 RF</b>		
DATE			OCT 2017
SCALE			TO FIT